

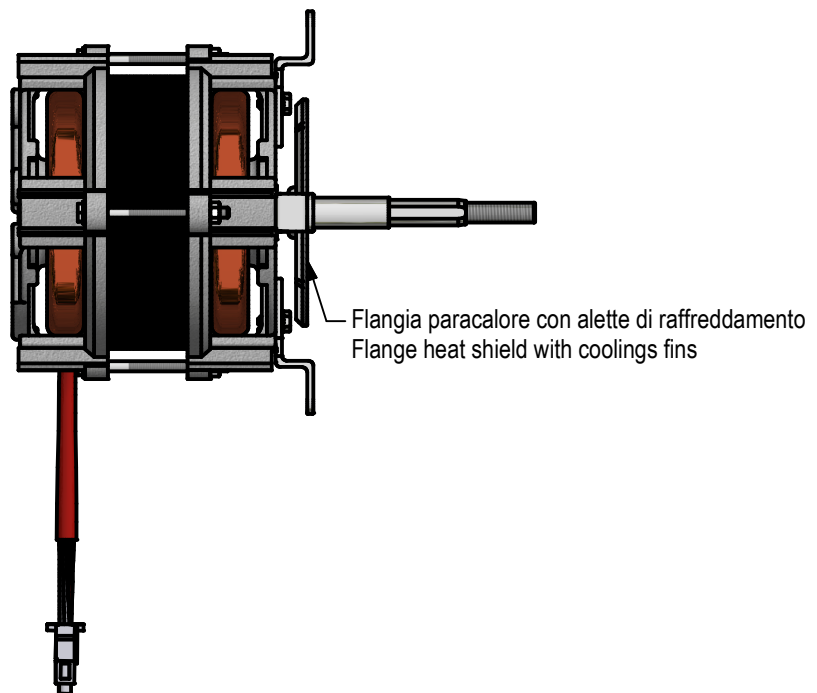
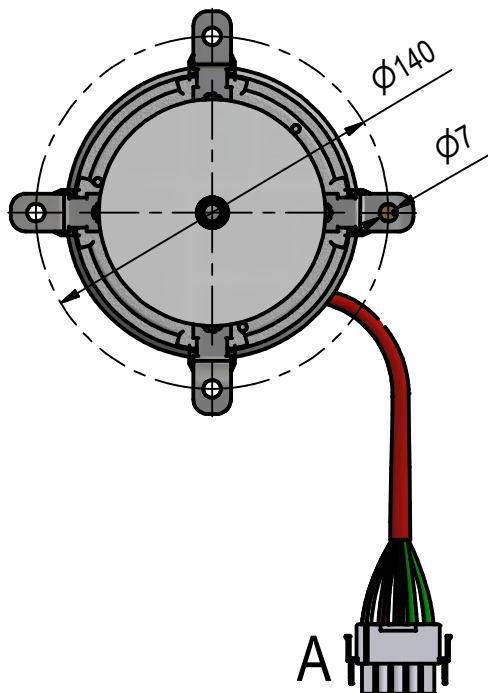


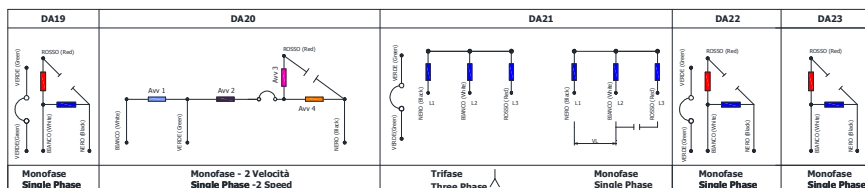

Connessione Connection

Schema di connessione Wiring diagram

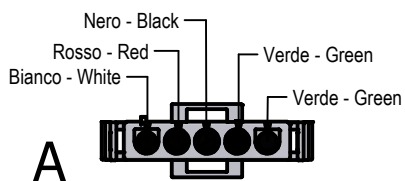

Modello Part number	Volt (V)	W Out / In	Corrente Current (A)	Frequenza Frequency (Hz)	RPM	Condensatore Capacitor (uF)
DA19	230 / 220 / 200	150 / 210	1,0	50 / 60	2800	6,3 / 8
DA20	230/220/200	150 / 220	1,2	50 / 60	2750/2000	16 / 18
DA21	400	150 / 220	0,6	50 / 60	2800	-
	230	150/220	0,6	50 / 60	2800	4
BA33	230	175/300	1,3	50	1350	8

DA19000 / 1 / 2: Monofase una velocità reversibile

DA21000: Trifase

Caratteristiche:

- Cuscinetti a sfere a doppio schermo, tipo C3, lubrificati a vita con grasso per alte temperature -40°C / +200°C, punto di goccia oltre 260°C
- Protettore termico di serie, temperatura di apertura 170°C
- Classe di isolamento: F
- Materiale albero: AISI 303 o 304

DA19000 / 1 / 2: Single phase two speed reversible

DA21000: Three phase

Characteristics:

- Double shield ball bearings, C3 type, lubricated for life with grease for temperatures -40°C / +200°C, dropping point over 260°C
- Thermal protector included, opening temperature at 170°C
- Insulation class: F
- Shaft material: AISI 304 or 304

